




CXW-200-A830
 Motor Power 200W
 Unrestricted Air Flow 1500m³/hr
 Noise Level ≤56dB
 Grease Separation Rate ≥92%
 Dimension (WxDxH)
 595x510x(560~960)

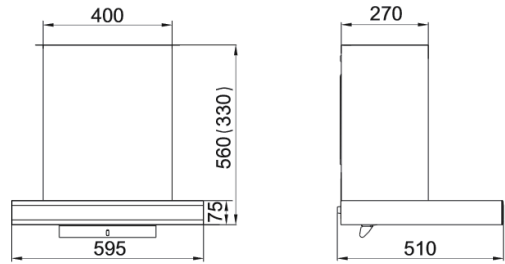


Technical Specification

| | | | |
|---------------------------|------------------------|-------------------------------------|---------------------|
| Model | CXW-200-A830 | Dimensions (WxLxH) | 595x510x(560~890)mm |
| Power Supply | 220-240V ~ 50Hz | Input Power of Unit | 202W |
| Unrestricted Airflow | 1500m ³ /hr | Maximum Motor Power | 200W |
| European Standard Airflow | 1020m ³ /hr | Maximum Light Power | ≤2W |
| Maximum Static Pressure | ≥800Pa | Net Weight of Unit | 22kg |
| Nominal Pressure | ≥500Pa | Odour Decrease Rate (Instantaneous) | ≥76% |
| Noise (Max/Min) | ≤56dB(A)/≤42dB(A) | Odour Decrease Rate (Normal) | ≥99% |
| Minimum Distance | Cooktop: 650mm | Grease Separation Rate | ≥92% |

- Note: 1. The performance test results are all in 230V~50Hz power supply environment. The airflow in according to EN61591, the noise in according to EN60704.
 2. The determined value of airflow, nominal wind pressure, max static pressure shall not be less than 90% of declared value.
 3. The noise declared value shown is A weighted sound pressure level, and the sound power level is A weighted sound power level plus 14 decibels.

Control Panel

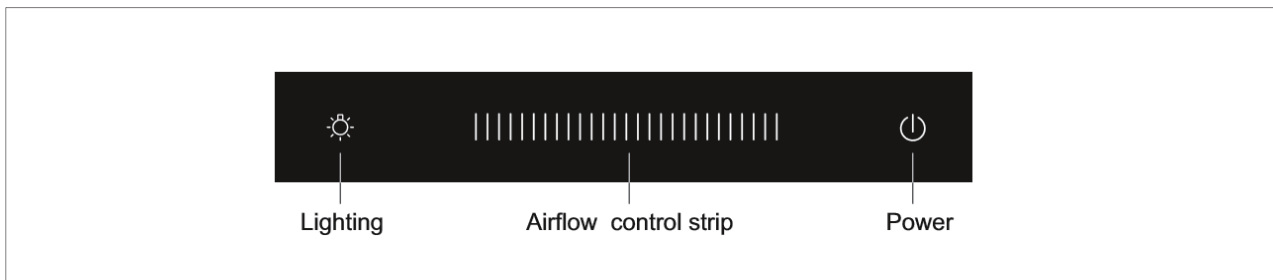

Accessories

| Packing List | No. | Name | Quantity | No. | Name | Quantity |
|--------------|-----|--|----------|-----|-----------------------------|----------|
| | 1 | Range hood | 1 | 9 | ST4.2×18 self-tapping screw | 10 |
| | 2 | Ø185(outer diameter) aluminum exhaust pipe | 1 | 10 | ST4.2×8 self-tapping screw | 6 |
| | 3 | Ø185Exhaust pipe connection | | 11 | 4×60 wood screw | 4 |
| | 4 | Exhaust pipe fixed strip | | 12 | M6 metal expansion pipe | 1 |
| | 5 | Exhaust pipe tape | | 13 | Hitching foot | 1 |
| | 6 | Plastic expansion pipe | | 14 | Hitching foot stopper | 1 |
| | 7 | User manual | 1 | 15 | Oil cup | 1 |
| | 8 | Check valve | 1 | | | |

